
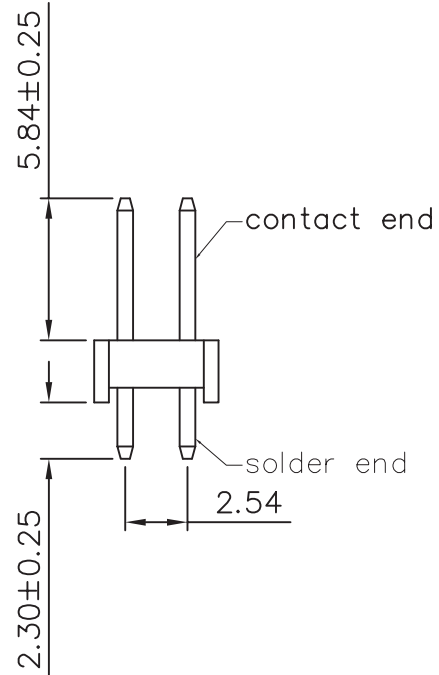
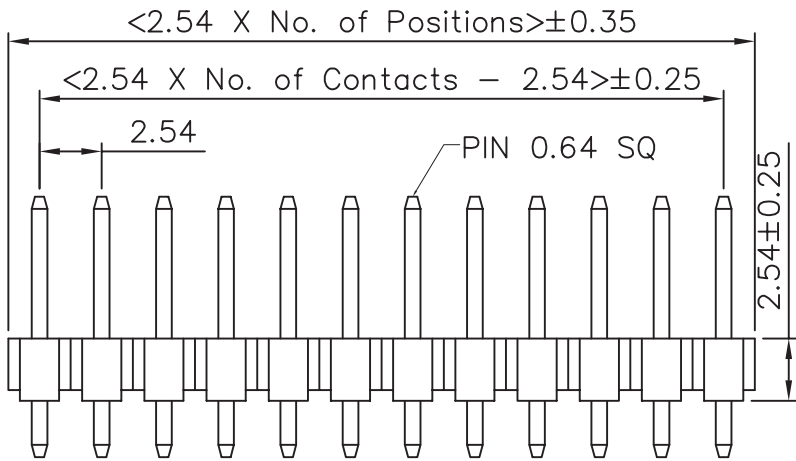


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0 PBT
 All materials must be RoHS materials

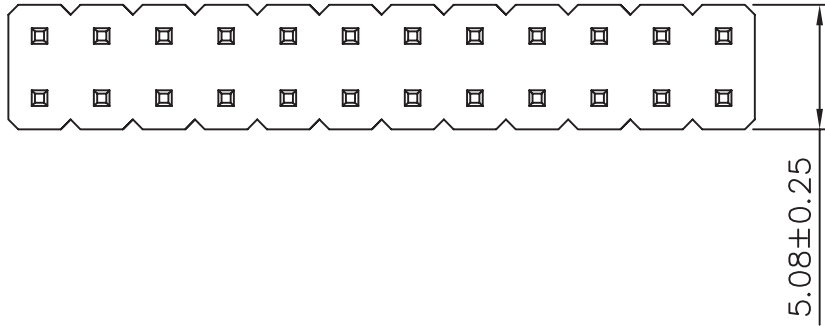

QUALITY SYMBOLS ▼ .0 ▽ .0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE: 1:1	NUMBER:				
		MM	INCH	MATERIAL:		HRC:		
		.X ±0.25	.X ±---	DRAWN BY	DATE	TITLE: 2.54 PIN HEADER DUAL ROWS DIP TYPE		
		.XX ±0.15	.XX ±---	CHECKED BY	DATE	THIRD ANGLE PROJECTION REVISE ON CAD ONLY		
	.XXX ±0.05	.XXX ±---	APPROVED BY DATE		PART NO.	DWG NO.	SHEET NO. 1/1	
ANGULAR ±3°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					A4