

Product Specification

NHD-2.4R-CTXP-BREAKOUT

TFT Liquid Crystal Display Module

NHD-	Newhaven Display
2.4-	Diagonal
R-	4-Wire Resistive Touch Panel
C-	Built-in Controller
T-	White LED Backlight
X-	TFT
P-	IPS, Wide Temperature
BREAKOUT-	Breakout Board

Table of Contents

Document Revision History.....	2
Mechanical Drawing	3
Pin Description	4
Interface Selection.....	4
Electrical Characteristics	5
Optical Characteristics	5
Touch Panel Characteristics	6
Controller Information.....	6
Timing Characteristics for TFT	7
Example Initialization Code.....	10
Quality Information	12

Additional Resources

- **Support Forum:** <https://support.newhavendisplay.com/hc/en-us/community/topics>
- **GitHub:** <https://github.com/newhavendisplay>
- **Example Code:** <https://support.newhavendisplay.com/hc/en-us/categories/4409527834135-Example-Code/>
- **Knowledge Center:** https://www.newhavendisplay.com/knowledge_center.html
- **Quality Center:** https://www.newhavendisplay.com/quality_center.html
- **Precautions for using LCDs/LCMs:** <https://www.newhavendisplay.com/specs/precautions.pdf>
- **Warranty / Terms & Conditions:** <https://www.newhavendisplay.com/terms.html>



Document Revision History

Revision	Date	Description	Changed By
-	11/12/2025	Initial Release	KL

Mechanical Drawing

Newhaven Display
NHD-2.4R-CTXP-BREAKOUT
Date Code

Part Label (type/format may vary)

OVERALL: 8.18±0.50
TFT+RTP: 3.85±0.20
PCB: 1.60±0.15

2.4 Inch
240RGBx320

Product Description: 2.4" 240x320 Resistive Touch IPS TFT w/ Breakout PCB

1. Driver IC: ST7789VI
2. Interface: Parallel, SPI
3. Power Requirement: 3.3V/5.0V
4. Optical Features: Normally Black, Transmissive, Anti-Glare, 280cd/m²
5. Key Features: EMI Shielding, Backlight Driver, microSD Card Reader, Mounting Holes

Standard Tolerance: (Unless otherwise specified)		
	Drawing/Part Number: NHD-2.4R-CTXP-BREAKOUT	Revision: -
Linear: ±0.3mm	Drawn By: K. Lewis	Approved By: K. Lewis
	Drawn Date: 11/12/2025	Approved Date: 11/12/2025
Unless otherwise specified: • Dimensions are in Millimeters • Third Angle Projection		
This drawing is solely the property of Newhaven Display International, Inc. The information it contains is not to be disclosed, reproduced or copied in whole or part without written approval from Newhaven Display.		

Part Label (type/format may vary)

Standard Tolerance: (Unless otherwise specified) Linear: $\pm 0.3\text{mm}$	 NEWHAVEN DISPLAY INTERNATIONAL	
	Drawing/Part Number: NHD-2.4R-CTXP-BREAKOUT	Revision: -
Unless otherwise specified: • Dimensions are in Millimeters • Third Angle Projection 	Drawn By: K. Lewis	Approved By: K. Lewis
	Drawn Date: 11/12/2025	Approved Date: 11/12/2025
This drawing is solely the property of Newhaven Display International, Inc. The information it contains is not to be disclosed, reproduced or copied in whole or part without written approval from Newhaven Display.		

Pin Description

J1:

Pin No.	Symbol	External Connection	Function Description
1	GND	Power Supply	Ground
2	DCX	MPU	Data / Command selection: '1' = Data ; '0' = Command
3	WRX	MPU	Active LOW Write signal
4	RDX	MPU	Active LOW Read signal
5-20	DB0-DB15	MPU	Bi-directional data bus 8-bit: use DB8-DB15 16-bit: use DB0-DB15

Recommended Connector: 20pin, 1x20, 2.54mm pitch.

J2:

Pin No.	Symbol	External Connection	Function Description								
1	GND	Power Supply	Ground								
2	VIN	Power Supply	Supply Voltage (3.3V or 5V)								
3	TP_SDA/YD	MPU	Resistive Touch Panel: <table><tr><td>TP_YD</td><td>Down</td></tr><tr><td>TP_XL</td><td>Left</td></tr><tr><td>TP_YU</td><td>Up</td></tr><tr><td>TP_XR</td><td>Right</td></tr></table>	TP_YD	Down	TP_XL	Left	TP_YU	Up	TP_XR	Right
TP_YD	Down										
TP_XL	Left										
TP_YU	Up										
TP_XR	Right										
4	TP_SCL/XL										
5	TP_INT/YU										
6	TP_RST/XR										
7	IM0	MPU	No Connect								
8	IM1		No Connect								
9	IM2		No Connect								
10	SDO	MPU	Serial Data Output								
11	SDA	MPU	Serial Data Input								
12	CSX	MPU	Active LOW Chip Select signal								
13	SCL	MPU	Serial Clock								
14	RST	MPU	Active LOW Reset signal								
15	BLK	MPU	No Connect								
16	GND	Power Supply	Ground								
17	TE	MPU	Tearing Effect Output								
18	SD_SDO	MPU	SD card Serial Data Output								
19	SD_CS	MPU	SD card Chip select Signal								
20	SD_CD	MPU	SD Card Detect Pin								

Recommended Connector: 20pin, 1x20, 2.54mm pitch.

Interface Selection

Interface	IM0		IM1		IM2	
	R1	R2	R3	R4	R5	R6
8-bit 8080-II Parallel (default)	Close	Open	Open	Close	Open	Close
16-bit 8080-II Parallel	Open	Close	Open	Close	Open	Close
3-wire SPI	Close	Open	Close	Open	Open	Close

Electrical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating Temperature Range	T _{OP}	Absolute Max	-20	-	+70	°C
Storage Temperature Range	T _{ST}	Absolute Max	-30	-	+80	°C
Supply Voltage for LCD	V _{DD}	-	3.3	-	5.5	V
Supply Current	I _{DD}	V _{DD} = 5.0V	-	200	280	mA

Optical Characteristics

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Optimal Viewing Angles	Top	φY+	CR ≥ 10	-	80	-	°
	Bottom	φY-		-	80	-	°
	Left	θX-		-	80	-	°
	Right	θX+		-	80	-	°
Contrast Ratio		CR	-	800	1500	-	-
Luminance		L _V	I _{LED} = 80mA	200	280	390	cd/m ²
Response Time		T _R + T _F	T _{OP} = 25°C	-	35	45	ms
Chromaticity	Red	X _R	-	0.611	0.641	0.671	-
		Y _R	-	0.306	0.336	0.366	-
	Green	X _G	-	0.307	0.337	0.367	-
		Y _G	-	0.563	0.593	0.623	-
	Blue	X _B	-	0.113	0.143	0.173	-
		Y _B	-	0.038	0.068	0.098	-
	White	X _W	-	0.276	0.306	0.336	-
		Y _W	-	0.295	0.325	0.355	-

Touch Panel Characteristics


Item	Min.	Typ.	Max.	Unit
Linearity	-	-	1.5	%
Circuit Resistance – X-Axis	200	-	600	Ω
Circuit Resistance – Y-Axis	250	-	900	Ω
Insulation Resistance	20	-	-	M Ω
Operating Voltage	-	-	5	V
Chattering	-	-	15	ms
Activation Force	100	-	-	g
Pen Writing Durability	100,000	-	-	Characters
Pitting Durability	1,000,000	-	-	Touches
Surface Hardness	3	-	-	H

Controller Information

Built-in ST7789VI Controller: <https://support.newhavendisplay.com/hc/en-us/articles/10814990300823-ST7789VI>


Timing Characteristics for TFT

Parallel 8/16-bit Interface Timing Characteristics

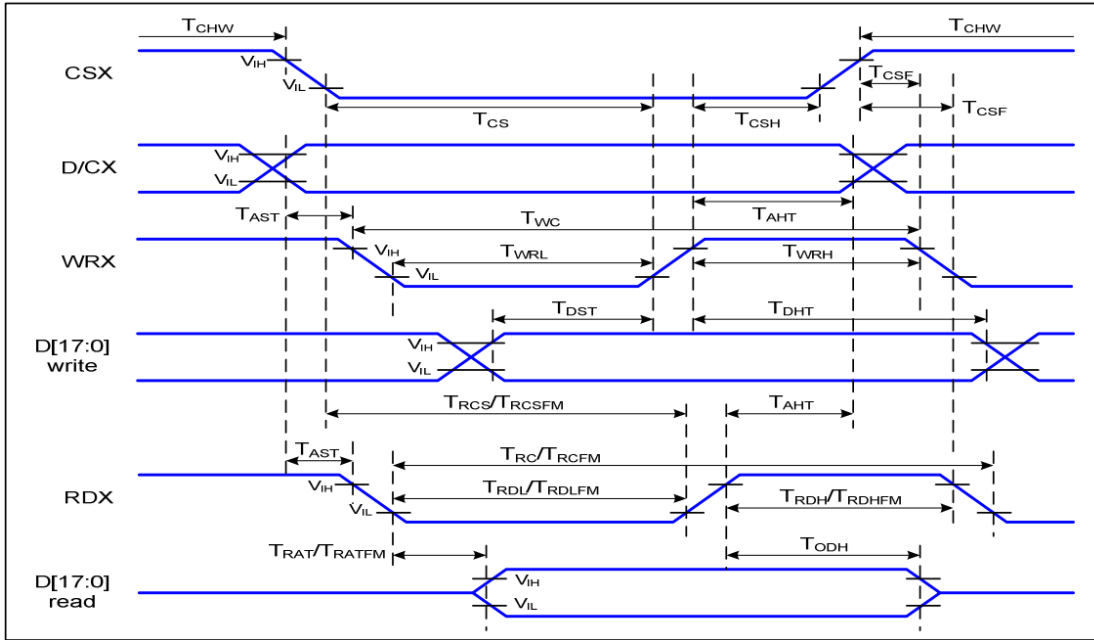


Signal	Symbol	Parameter	Min	Max	Unit	Description
D/CX	T _{AST}	Address setup time	0		ns	-
	T _{AHT}	Address hold time (Write/Read)	10		ns	
CSX	T _{CHW}	Chip select "H" pulse width	0		ns	-
	T _{CS}	Chip select setup time (Write)	15		ns	
	T _{RCS}	Chip select setup time (Read ID)	45		ns	
	T _{RCSFM}	Chip select setup time (Read FM)	355		ns	
	T _{CSF}	Chip select wait time (Write/Read)	10		ns	
	T _{CSH}	Chip select hold time	10		ns	
WRX	T _{WC}	Write cycle	66		ns	
	T _{WRH}	Control pulse "H" duration	15		ns	
	T _{WRL}	Control pulse "L" duration	15		ns	
RDX (ID)	T _{RC}	Read cycle (ID)	160		ns	When read ID data
	T _{RDH}	Control pulse "H" duration (ID)	90		ns	
	T _{RDL}	Control pulse "L" duration (ID)	45		ns	
RDX (FM)	T _{RCFM}	Read cycle (FM)	450		ns	When read from frame memory
	T _{RDHFM}	Control pulse "H" duration (FM)	90		ns	
	T _{RDLFM}	Control pulse "L" duration (FM)	355		ns	
D[17:0]	T _{DST}	Data setup time	10		ns	For CL=30pF
	T _{DHT}	Data hold time	10		ns	
	T _{RAT}	Read access time (ID)		40	ns	
	T _{RATFM}	Read access time (FM)		340	ns	
	T _{ODH}	Output disable time	20	80	ns	

3-wire Serial interface Timing Characteristics

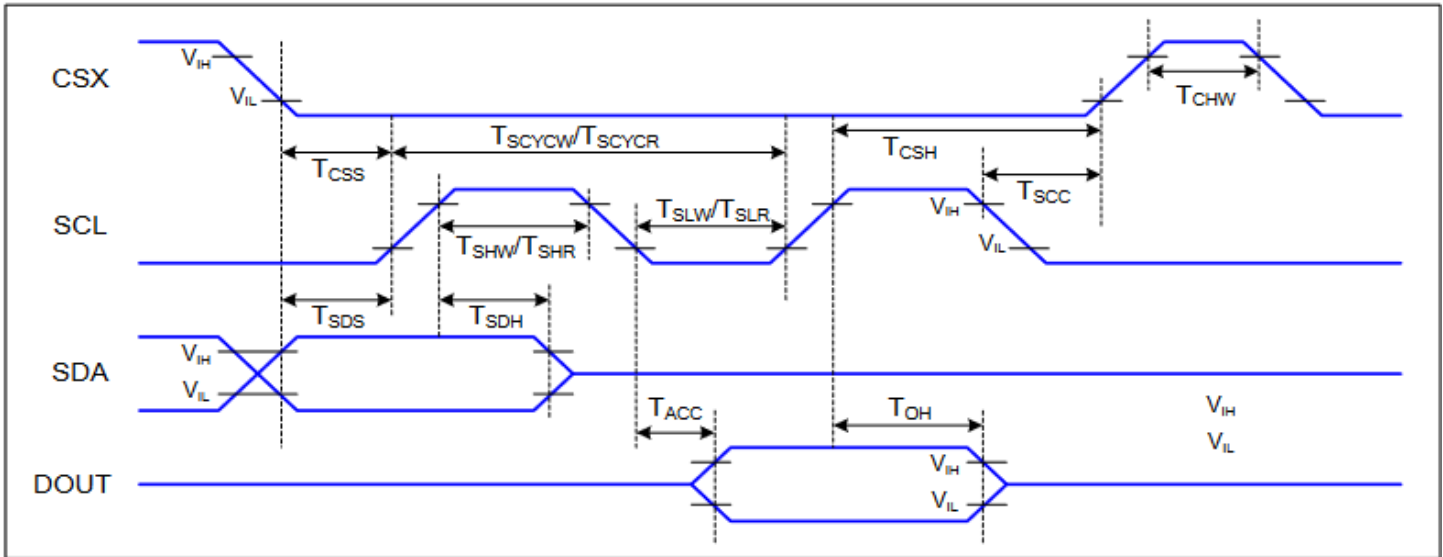


Signal	Symbol	Parameter	Min	Max	Unit	Description
CSX	T_{CSS}	Chip select setup time (write)	15		ns	
	T_{CSH}	Chip select hold time (write)	15		ns	
	T_{CSS}	Chip select setup time (read)	60		ns	
	T_{SCC}	Chip select hold time (read)	65		ns	
	T_{CHW}	Chip select "H" pulse width	40		ns	
SCL	T_{SCYCW}	Serial clock cycle (Write)	16		ns	
	T_{SHW}	SCL "H" pulse width (Write)	7		ns	
	T_{SLW}	SCL "L" pulse width (Write)	7		ns	
	T_{SCYCR}	Serial clock cycle (Read)	150		ns	
	T_{SHR}	SCL "H" pulse width (Read)	60		ns	
	T_{SLR}	SCL "L" pulse width (Read)	60		ns	
SDA (DIN)	T_{SDS}	Data setup time	7		ns	
	T_{SDH}	Data hold time	7		ns	
DOUT	T_{ACC}	Access time	10	50	ns	For maximum CL=30pF
	T_{OH}	Output disable time	15	50	ns	For minimum CL=8pF

Reset Timing

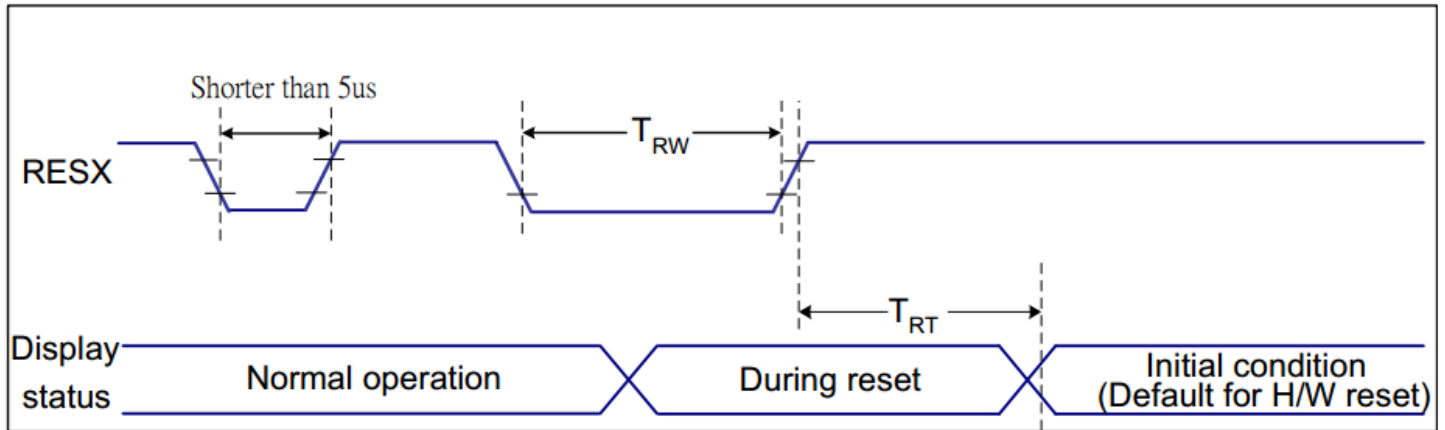

Related Pins	Symbol	Parameter	MIN	MAX	Unit
RESX	TRW	Reset pulse duration	10	-	us
	TRT	Reset cancel	-	5 (Note 1, 5)	ms
				120 (Note 1, 6, 7)	ms

Power ON/OFF Sequence

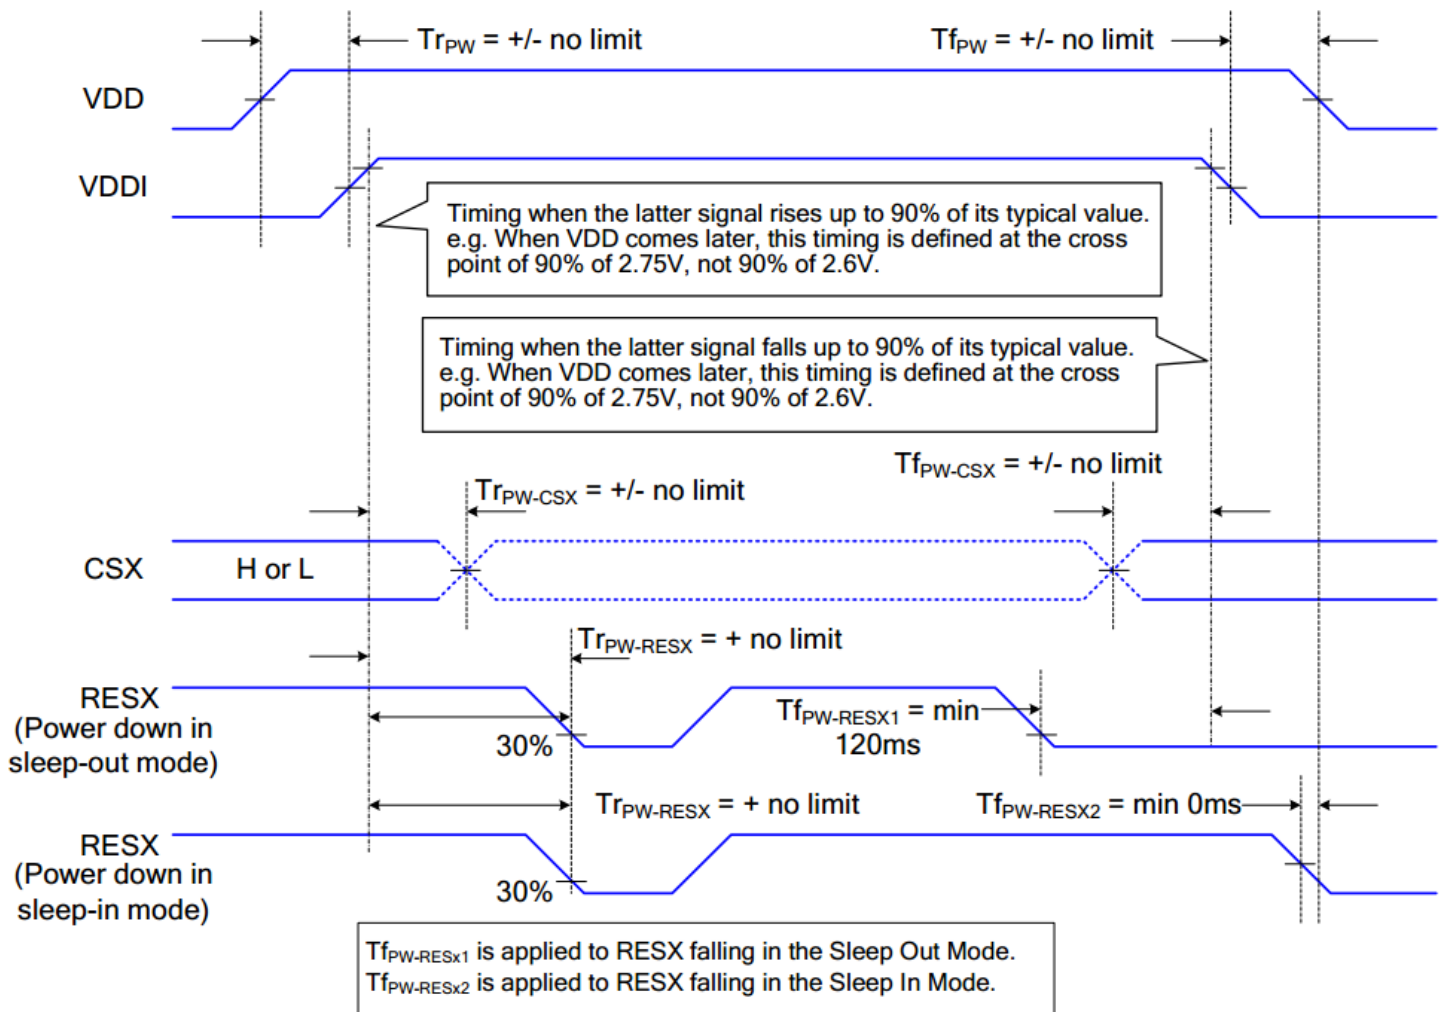

Example Initialization Code

```

/*****/
void Command_out(unsigned char c) //Function used for sending commands to TFT
{
    PORTA &= ~(1 << PORTA3); // Set DCX pin to LOW
    PORTL=c; // Assigning the Command Byte 'c' to PortL
    PORTA &= ~(1 << PORTA7); // Set WRX pin to LOW
    PORTA |= (1 << PORTA7); // Set WRX pin to HIGH
}

/*****/
void data_out(unsigned char d) //Function used for sending data to TFT
{
    PORTA |= (1 << PORTA3); // Set DCX pin to HIGH
    PORTL=d; // Assigning the Data Byte 'd' to PortL
    PORTA &= ~(1 << PORTA7); // Set WRX pin to LOW
    PORTA |= (1 << PORTA7); // Set WRX pin to HIGH
}

/*****/
void TFT_init(){

    digitalWrite(RESX, LOW);
    delay(250);
    digitalWrite(RESX, HIGH);
    delay(250);

    Command_out(0x28); //display off
    Command_out(0x11); //exit SLEEP mode
    delay(100);

    Command_out(0x36); //MADCTL: memory data access control
    data_out(0x88);

    Command_out(0x3A); //COLMOD: Interface Pixel format *** 65K-colors in 16bit/pixel (5-
6-5) format when using 16-bit interface to allow 1-byte per pixel
    data_out(0x55);

    Command_out(0xB2); //PORCTRK: Porch setting
    data_out(0x0C);
    data_out(0x0C);
    data_out(0x00);
    data_out(0x33);
    data_out(0x33);

    Command_out(0xB7); //GCTRL: Gate Control
    data_out(0x35);

    Command_out(0xBB); //VCOMS: VCOM setting
    data_out(0x2B);

    Command_out(0xC0); //LCMCTRL: LCM Control
    data_out(0x2C);

    Command_out(0xC2); //VDVVRHEN: VDV and VRH Command Enable
    data_out(0x01);
    data_out(0xFF);

```



```

Command_out(0xC3); //VRHS: VRH Set
data_out(0x11);

Command_out(0xC4); //VDVS: VDV Set
data_out(0x20);

Command_out(0xC6); //FRCTRL2: Frame Rate control in normal mode
data_out(0x0F);

Command_out(0xD0); //PWCTRL1: Power Control 1
data_out(0xA4);
data_out(0xA1);

Command_out(0xE0); //PVGAMCTRL: Positive Voltage Gamma control
data_out(0xD0);
data_out(0x00);
data_out(0x05);
data_out(0x0E);
data_out(0x15);
data_out(0x0D);
data_out(0x37);
data_out(0x43);
data_out(0x47);
data_out(0x09);
data_out(0x15);
data_out(0x12);
data_out(0x16);
data_out(0x19);

Command_out(0xE1); //NVGAMCTRL: Negative Voltage Gamma control
data_out(0xD0);
data_out(0x00);
data_out(0x05);
data_out(0x0D);
data_out(0x0C);
data_out(0x06);
data_out(0x2D);
data_out(0x44);
data_out(0x40);
data_out(0x0E);
data_out(0x1C);
data_out(0x18);
data_out(0x16);
data_out(0x19);

Command_out(0x2A); //X address set
data_out(0x00);
data_out(0x00);
data_out(0x00);
data_out(0xEF);

Command_out(0x2B); //Y address set
data_out(0x00);
data_out(0x00);
data_out(0x01);
data_out(0x3F);
delay(10);
Command_out(0x21); //Color inversion for IPS
Command_out(0x29); //display ON
delay(10);
}

```

Quality Information

Test Item	Content of Test	Test Condition	Note
High Temperature Storage	Endurance test applying the high storage temperature for a long time.	+80°C, 240hrs	2
Low Temperature Storage	Endurance test applying the low storage temperature for a long time.	-30°C, 240hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time.	+70°C, 120hrs	2
Low Temperature Operation	Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time.	-20°C, 120hrs	1,2
High Temperature / Humidity Operation	Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time.	+60°C, 90% RH, 240hrs	1,2
Thermal Shock resistance	Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress.	-30°C 30min -> 25°C 5min -> 80°C 30min = 1 cycle. For 100 cycles	
Vibration test	Endurance test applying vibration to simulate transportation and use.	10Hz-55Hz, 1.5mm amplitude. 10min in each of 3 directions X,Y,Z	3
Static electricity test	Endurance test applying electric static discharge.	Air discharge: ±8kV 10 Times Contact discharge: ±4kV 10 Times	

Note 1: No condensation to be observed.

Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.

Note 3: Test performed on product itself, not inside a container.